




# Circlines

C, CX6, CX6SQ, CPuff

9", 11", 12", 14", 19"


Round "DECO"

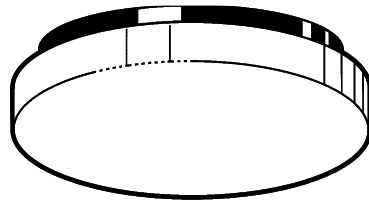


- C22X6 1)FC8T9 11"
- C32X6 1)FC12T9 14"
- C54X6 1)FC8T9 & FC12T9 14"
- C40X6 1)FC16T9 19"
- C72X6 1)FC12T9 & FC16T9 19"

- C22X6-2PL9 11"
- C32X6-2PL13 14"
- C32X6-2PL26 14"

CHROME

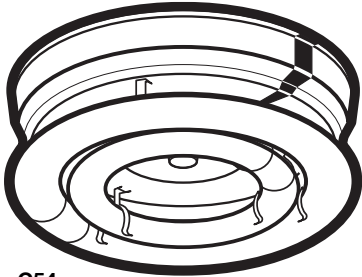


C54

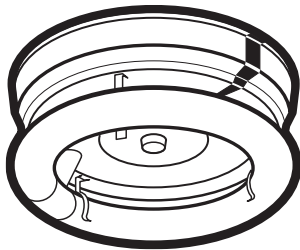

- C22 WHITE
- C32 CHROME

Same as above but SQUARE

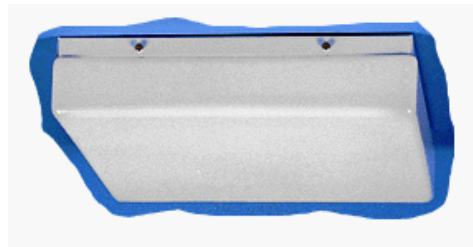

Round "Puff"



**Housing:** Die-formed heavy gauge steel with high-gloss baked white enamel finish (minimum reflectance 86%) over rust inhibiting phosphate coat. Chrome model is plated finish.



**Shielding:** Translucent white acrylic diffuser (X6, X6SQ, Puff).

**Electrical:** Fluorescent wired for 120V, 60Hz AC operation, thermally protected, Class P, sound rated A, nominal power factor ballast, unless otherwise specified. UL listed.

**Mounting:** Ceiling mount. 54W and 72W models require both lamps to be installed.

**Critical Application:** Edsun strives to offer the most current product designs and value. Consequently, all Edsun products are subject to redesign and revision. Critical applications such as size, operating temperature, or sensor operation should be confirmed with the factory.

## DIMENSIONS

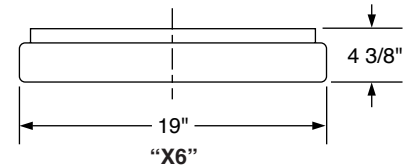

## FEATURES AND BENEFITS

- Bare bulb or diffused light (C) • Economical, efficient lighting source
- Translucent white acrylic diffuser ("X6 & Puff") • Soft, even illumination; flawless look
- Chrome set screws (X6 & Puff) • Easy installation and maintenance

## ORDERING INFORMATION

Example: C22W120V

SERIES	LAMPS	HOUSING	OPTION	VOLTAGE
C - Bare Bulb PC 555 - Shade	22 - (1) 22W Circline 32 - (1) 32W Circline 54 - 22W & 32W Circlines	For C Bare Bulb Series Only Blank for Chrome W - White	L1 - Lamps Included	120V 277V