


2 x 4 Recessed Troffer "LYP" for Parabolic Louvers

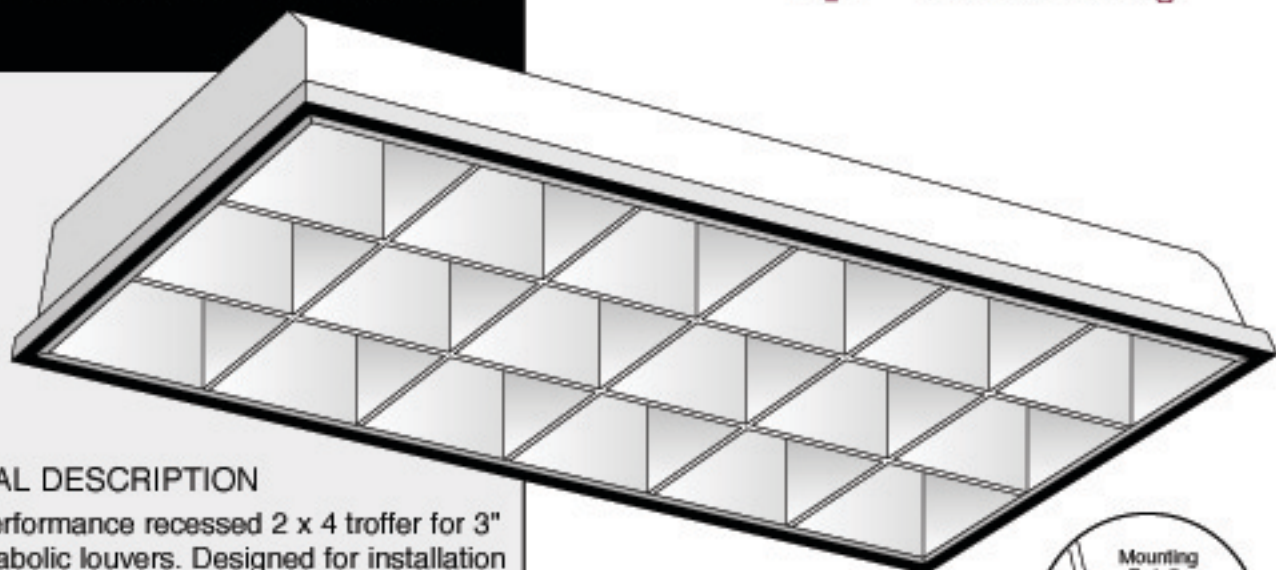

GENERAL DESCRIPTION

A high performance recessed 2 x 4 troffer for 3" deep parabolic louvers. Designed for installation in exposed T-bar ceilings and U.L. listed as a recognized component.

Housing: 5-3/4" deep. Die formed in standard 23-gauge cold rolled steel to meet NYC specifications, with rolled side flanges for safety. Side flanges stand over parabolic convert-a lume. Provided with four corner tie points for safety wire supports.

Ends: Snap in to housing and attach to parabolic body and side flanges with rivets. Built-in earthquake clips attach fixture to grid. Same ends fit 2 x 2 and 2 x 4 fixtures.

Socket Plates: Snap-in mounting style. Available for 2, 3 or 4 T8 or T12 lamps. Sockets are tilted forward to provide positive spring action contact with the lamps. Same socket plates fit 2 x 2 and 2 x 4 fixtures.


Ballast Cover: Snaps in without tools for easy installation.

Access Plate: Snaps in for simple ballast lead hook up without removing ballast cover.

Finish: All parts have a high reflective baked white enamel finish. Minimum 87% reflectivity.

NOTES

Dimensions subject to change without notice

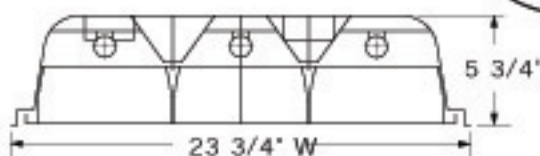

ORDERING INFORMATION

Catalog No.	Lamps	Type
LYP24-232	2)F32 Electronic	23 ga.
LYP24-332	3)F32 Electronic	23 ga.
LYP24-432	4)F32 Electronic	23 ga.
LYP24-240	2)F40 Magnetic	23 ga.
LYP24-340	3)F40 Magnetic	23 ga.
LYP24-440	4)F40 Magnetic	23 ga.
LYP24-6PLL40	6)PLL40 Electronic	23 ga.

Options:

Different voltages, Emergency battery, Lamps, Tailed, Chrome Reflector.



569 W 17 St., Hialeah, FL 33010-2412
Ph: 305-888-8849 • Fax: 305-883-0005 e-mail sales@edsunlighting.com

Committed to Quality!