

"VT" SERIES DATA

Enclosed/Gasket Latches



VT Latch (standard)
Molded Celcon
White Latch
 Used for general purpose applications.

The VT Standard Latch, the general purpose latch, enables you to be more selective in your choice of latches for use in your final environment. It should be noted, the VT Latch will be shipped as the standard, unless specified otherwise. Here are other Latch choices that you can choose from. **Special order Only.**
 LPC - Molded Polycarbonate White Latch Used in acid type atmosphere. (optional)



VT SS Latch (optional)
Stainless Steel latch
 Used where specified or required.

It should be understood that the various use parameters involved in an actual application, e.g., chemical exposure duration, loading, temperature, fatigue, stress relaxation, life expectancy, outdoor exposure, etc., may alter performance significantly.

Therefore the chemical resistance presented should be used only as a general guideline, not as a substitute for an actual product performance testing program.

Applications

Food Processing Facilities
 Kitchens
 Parking Garages
 Car Washes
 Schools
 Government Facilities
 Industrial Facilities
 Public Areas


Approvals and/or Listings

Underwriters Laboratories
 NSF International
 U.S. Department of Agriculture
 Canadian Standards Association


VT Dimensions

Cat No.	A	B	C	D
VT 240	7-5/8"	5-5/8"	3"	49-13/16"
Cat No.	A	B	C	D
VT 248	7-5/8"	5-5/8"	3"	49-13/16"
Cat No.	A	B	C	D
VT 296	7-5/8"	5-5/8"	3"	97-13/16"


End View & Section




Side View



Top View (4' Unit)



Top View (8' Unit)

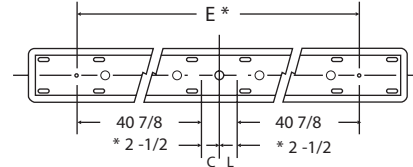

* = Stud Location

Features:

STRUCTURALLY RIGID FIBERGLASS BODY
 Body is fiberglass reinforced polyester and self-extinguishing (ASTMD635-74). This type of construction does not allow the body to flex during handling and installation.

GASKETED DIFFUSER RETENTION SLOT
 The gasketed inverted U-slot provides a positive continuous seal between body and diffuser.

BRASS FIXTURE MOUNTING STUD
 The fixture studs are integrally molded into the body to facilitate lighting fixture installation.

HIGH IMPACT ACRYLIC/DR DIFFUSER
 Internal crepe pattern allows a smooth exterior surface for ease of cleaning.

DIFFUSER
 The diffuser flange fits snugly into the gasketed retention slot forming a continuous seal.