



LEDone®

Date: _____ Location: _____
Product: _____ Project: _____
Quantity: _____ Catalog #: _____

FIXTURE TYPE: **C1L**

LED 4FT Type A+B Series



FEATURES

- NSF approved
- **Type B Single or Double Ended, no ballast**
- **Plug & Play w-ballast** Dual Mode (Type A +B)
- Shatterproof glass
- Low thermal decay & maintenance
- No Mercury or UV
- 50,000 hours lifetime
- NSF rated for splash zone and non - food zone

SUITABLE APPLICATIONS

- Commercial buildings
- Hotels
- Conference rooms
- Schools
- Supermarkets
- Factories
- Hospitals
- Office Buildings
- Airports

CONSTRUCTION:

Shatterproof glass body with PET film and soft light.

OPTICAL SYSTEM:

Bridgelux or Samsung 2835 LED chips. 200° beam angle / 300° view angle

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Ballast compatible. Available as 120-277V input. Single end and double ended are all available which can be compatible with shunted or non-shunted sockets. -20°C to 50°C, -4°F to 122°F.

INSTALLATION & MOUNTING:

BALLAST BYPASS:

Type B single or double ended. Plug & Play dual mode (Type A & B).
Hot & Neutral on one or opposite ends.

NSF Model Numbers:

- LOC-4FTT8GP-17W35K
- LOC-4FTT8GP-17W40K
- LOC-4FTT8GP-17W50K



EDSUN MODEL NUMBER	CCT	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
LLED17T8/4K-AB	4,000K	17W	2,500LM	147.059LM/W	80	0.9	20%	32W – 36W HID
LLED17T8/5K-AB	5,000K	17W	2,500LM	147.059LM/W	80	0.9	20%	32W – 36W HID

DLC Product ID:

- 1- LOC-4FTT8AB-17W40KFD – S-RFXJCM
- 2- LOC-4FTT8AB-17W50KFD – S-UERASH


LED 4FT Type A+B Series



LEDone®



Series	Type	Wattage	CCT Options	Lens	Power
LED1 17T8 LOC	T8 4 Foot	17W	4000K 5000K	Frosted	AB – Type A & B

MEASUREMENTS

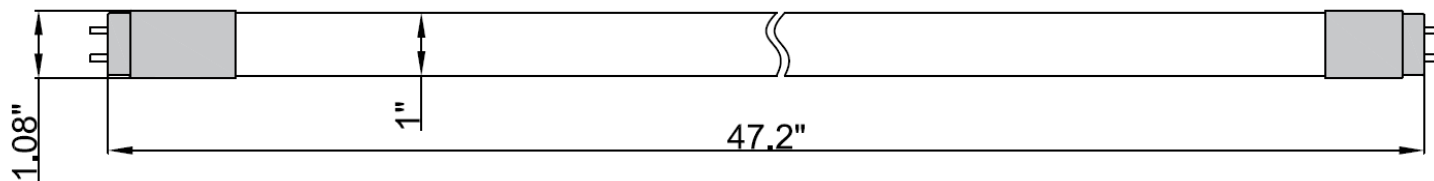

MODEL NUMBER	QUANTITY	WEIGHT	UPC CODE
LOC-4FTT8AB-17W40KFD	1	0.526 lbs	00810050942546
LOC-4FTT8AB-17W50KFD	1	0.526 lbs	00810050942539

PHOTOMETRIC DATA

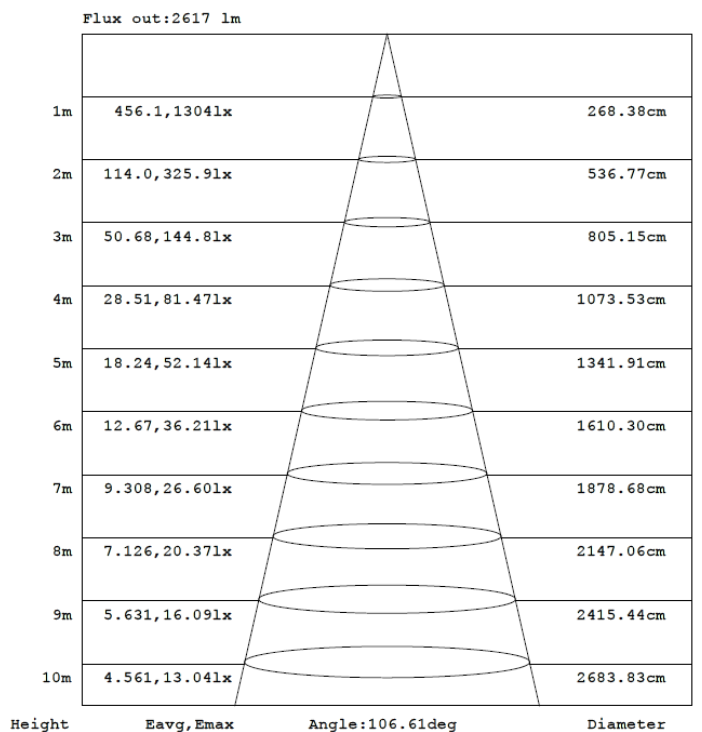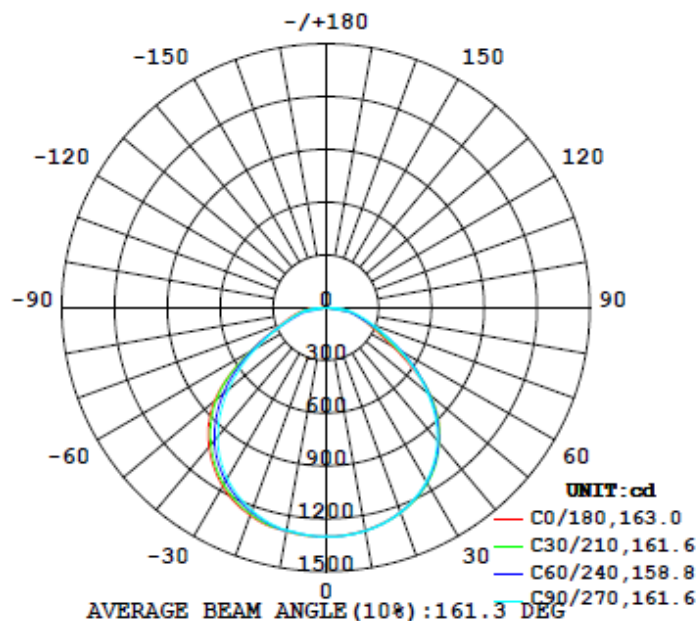

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.