

LEDBHHA4

4" Architectural Downlight -



Project:	
Type:	
Catalog #:	

STANDARD



FEATURES

- CS-Color selectable 2700k (soft white), 3000k (warm white), 3500k(warm/neutral white), 4000k (neutral white), and 5000k (cool white) color temperatures.*
- Long-life LEDs provide at least 70% of initial lumen output (L_{70}) for 149,000 hours of operation.**
- Color rendering index (R_a) > 90.
- Field selectable lumen output:
LEDHHA4UNV-CS-WS = 1,000, 800, or 500 nominal lumens.
- Uses 12, 9, or 6 nominal watts.
- Universal 120-277V AC voltage (50-60Hz) is standard.
- Power factor > 0.90.
- 0-10VDC dimming is standard.
- Aluminum housing.
- Easy installation in new construction or retrofit applications.
- Compatible with 4.35" ceiling cut-outs and 4" mounting frames.
- Type IC. Access above ceiling required. Covered ceiling mount only.
- EM= Remote Emergency Battery back-up option w test button.

* Contact factory for other color temperatures and lumen packages.

** L_{70} hours are IES TM-21-11 calculated hours.




WARRANTY & LISTINGS

Color-Wattage Selectable

- cETLus listed for wet locations not exceeding 45°C (113°F).
- Energy Star certified.
- Compatible for new construction and retrofit applications.
- Complies with FCC Part 15, class B.
- Complies with EN61000-4-5 surge protection (1.5kV).
- 1-year warranty of all electronics and housing.

DIMENSIONS

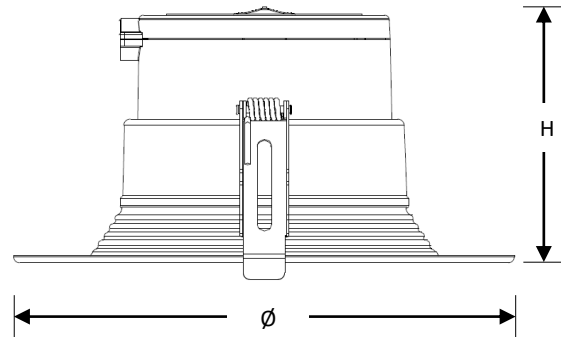

Series	Ø	H	Weight
CDR4-1L-LKFS-WHT	5.1"	3.2"	0.7 lbs

ORDERING INFORMATION

Example: **LEDBHHA4UNV-CS-WS**

Series	Nominal Lumen Output (Selectable)	CCT (Selectable)	Baffle Type	
1L	1,000/800/500	LKFS	WHT	White Baffle