



Specification Sheet : RPEXITPHLUMNSC

Project: _____ Type: _____ Model No.: _____

Remarks: _____

Specifications:

NO additional electrical or mechanical source required.
Before installation it must be determined that there is a minimum of 5 Fc of fluorescent light on the face(s) of the sign at all times during building occupancy.

Approvals:

Meets NFPA Life Safety Code 101 and OSHA
Meets International Building and Fire Codes
Listed through UL 924 for the USA and Canada
Listed with the State of California State Fire Marshal

Listings & Certifications:




Model:



Mechanical Data:

Multiple Mounting Positions Shown

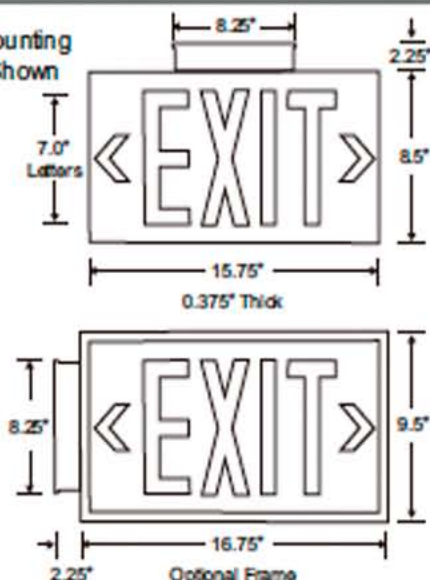

Standard Features:

- High Illumination Non-Electric Photoluminescent Technology
- Long Life Corrosion-Proof Construction (20 Yrs. Est.)
- High Visibility In Total Darkness And Smoke Filled Conditions
- Suitable For Floor Proximity Installation
- 50 Ft Viewing Distance
- Field Applied Directional Chevrons
- Aluminum Construction With Photoluminescent Lettering
- LEED Points Qualified
- Non-Toxic, Non-Radioactive
- Designed For Surface, Wall And Ceiling Mount With Optional Frame And Mounting Bracket
- Thin, Low Profile Construction
- Consistent, Uniform Illumination
- Can Be Used For Both High Level And Low Level Applications
- Requires Virtually No Maintenance - No Bulbs, No Battery
- Replacement Can Be Relocated If Path Of Egress Changes
- Both High And Low Location Approved

Ordering Information:

Base Model No.	Number of Faces	Background Color	Frame Color
RPEXITPHLUMNSC	S - Single	R - Red	B - Black
		G - Green	R - Red
		B - Black	G - Green
	D - Dual	SR - Brushed Aluminum w/ Red Letter Outline	S - Silver Powder Coat
		SG - Brushed Aluminum w/ Green Letter Outline	W - White
			Blank - No Frame

Build part number by adding Base Model No., one of each Number of Faces, Background Color and Frame Color.

Example: RPEXITPHLUMNSC-S-SR