

Bollard Series

Flat Top Bollard with Louvers



BOFL

Housing:

Extruded Aluminum Housing with Flush Mounting Base & Vandal-Resistant Screws, Flat Top, Powdercoat Finish Over a Chromate Conversion Coating, Internal Ballast Tray for Easy Maintenance

Reflector:

Cast Aluminum Louvers

Lens:

Clear Polycarbonate Lens

Socket:

HID: Porcelain 4KV Pulse Rated Mogul Base Socket with Nickel Plated Screw Shell

PL: Plug-In Type, GX24Q-4

Mounting:

Mounting Kit with 4" (Anchor Bolts Included)

Wattage:

High Pressure Sodium: 70 to 100w

Metal Halide: 70 to 100w

Compact Fluorescent: 1 x 42 to 57w

Listings & Ratings:

CSA: Listed for Wet Locations

Edsun Lighting Fixture Manufg.

569 W 17 St., Hialeah, FL 33010

Ph.: 305 888-8849 • Fax: 305 883-0005

Web> www.edsunlighting.com

BOLF



Kit(s)


Catalog #	Description			
BOFL3*	Flat Top Bollard HID Kit with Louvers			
BOFL3F*	Flat Top Bollard PL Kit with Louvers			
Complete Units (Lamps Included)				
Catalog #	Wattage	Voltage	Lamp	Ballast
BOFL3H70R120L*	70	120	HPS	R-NPF
BOFL3H100R120L*	100	120	HPS	R-NPF
BOFL3H70QL*	70	Quad	HPS	HX-HPF
BOFL3H100QL*	100	Quad	HPS	HX-HPF
BOFL3M70QL*	70	Quad	MH	HX-HPF
BOFL3M100QL*	100	Quad	MH	HX-HPF
BOFL3F42EL*	1 x 42	120-277	PL	Electronic
BOFL3F57EL*	1 x 57	120-277	PL	Electronic

*Specify Color: BZ=Bronze, WH=White, BK=Black

Other Wattages & Custom Colors Available Upon Request.

Bollards can be cut to custom lengths upon request.


Dimensions

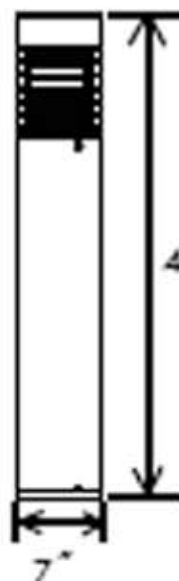

BOLAN



BOLPC

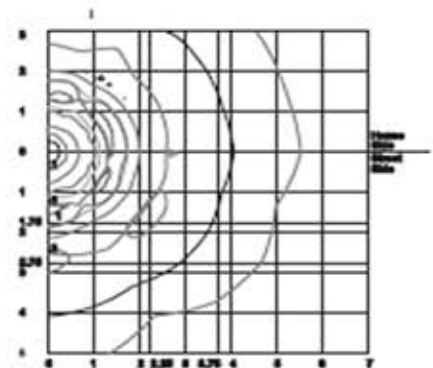

Distances in Units of Mounting Height
 Values Based On 10 Foot Mounting Height
 All Distances Are Approximate Values Based On Standard Curves
 (*) = Minimum Glare Point

Catalog #	Description
BOLAN4	Mounting Kit, Includes Bracket & Three (3) 4" Anchor Bolts
BOLAN8	Mounting Kit, Includes Bracket & Three (3) 8" Anchor Bolts
BOLAN12	Mounting Kit, Includes Bracket & Three (3) 12" Anchor Bolts
BOLAN15	Mounting Kit, Includes Bracket & Three (3) 15" Anchor Bolts
BOLPC	Replacement Polycarbonate Lens