

Bollard Series

Flat Top Bollard with Reflector



BOFR

Housing:

Extruded aluminum housing with flush mounting base & vandal-resistant screws, flat top, powdercoat finish over a chromate conversion, internal ballast tray for easy maintenance

Reflector:

Aluminum cone reflector

Lens:

Clear polycarbonate lens

Socket:

HID: Porcelain 4KV pulse rated medium base socket with nickel plated screw shell
 PL: Plug-in type, GX24Q-4
 Removable socket bracket for two height options.

Mounting:

Mounting Kit with 4" anchor bolts included

Wattage:

High Pressure Sodium: 70 to 100w
 Metal Halide: 70 to 100w
 Compact Fluorescent: 1 x 42 to 57w

Listing & Ratings:

CSA: Listed for wet locations

Other wattages & custom colors available on request.

BOLFR

Kits


Catalog #	Description
BOFR2*	Flat Top Bollard with Cone Reflector, 31 $\frac{1}{2}$ " High, HID Kit
BOFR2F*	Flat Top Bollard with Cone Reflector, 31 $\frac{1}{2}$ " High, Single PL Kit
BOFR3*	Flat Top Bollard with Cone Reflector, 42 $\frac{1}{2}$ " High, HID Kit
BOFR3F*	Flat Top Bollard with Cone Reflector, 42 $\frac{1}{2}$ " High, Single PL Kit

Complete Units (Lamps Included)

Catalog #	Wattage	Voltage	Lamp	Ballast
BOFR2H70R120L*	70	120	HPS	R-NPF
BOFR2H100R120L*	100	120	HPS	R-NPF
BOFR2H70QL*	70	Quad	HPS	HX-HPF
BOFR2H100QL*	100	Quad	HPS	HX-HPF
BOFR2M70QL*	70	Quad	MH	HX-HPF
BOFR2M100QL*	100	Quad	MH	HX-HPF
BOFR2F42EL*	1 x 42	120-277	PL	Electronic
BOFR2F57EL*	1 x 57	120-277	PL	Electronic
BOFR3H70R120L*	70	120	HPS	R-NPF
BOFR3H100R120L*	100	120	HPS	R-NPF
BOFR3H70QL*	70	Quad	HPS	HX-HPF
BOFR3H100QL*	100	Quad	HPS	HX-HPF
BOFR3M70QL*	70	Quad	MH	HX-HPF
BOFR3M100QL*	100	Quad	MH	HX-HPF
BOFR3F42EL*	1 x 42	120-277	PL	Electronic
BOFR3F57EL*	1 x 57	120-277	PL	Electronic

*Specify Color: WH=White, BK=Black, or BZ=Bronze

Dimensions

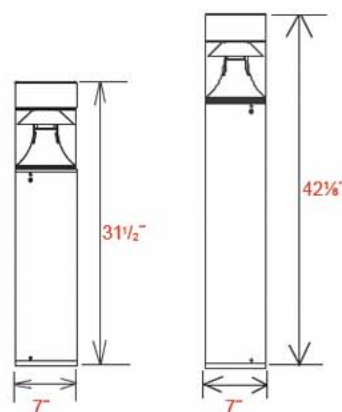

BOFR2

BOFR3

Edsun Lighting

Ph.: 305 888-8849

Fax: 305 883-0005

email:sales@edsunlighting.com