




CLS12



Canopy light (Shallow) 12 x 12

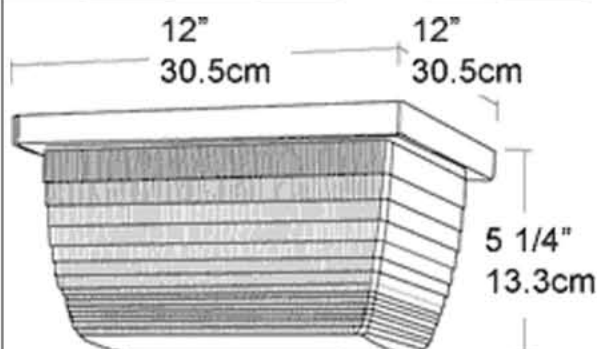

Compact Fluorescent 12"x12"x 5-1/4" Vandal Resistant Ceiling canopy fixture

CONSTRUCTION

- Die Cast Aluminum Housing
- Heat and UV Resistant Polycarbonate Lens
- Stainless Steel Screws (Fully Gasketed)
- Includes Porcelain Medium Base Socket
- Includes Steel Pan, Foil Reflector & Fiber Pad
- Includes Compact Fluorescent Lamp and Electronic Ballast

APPLICATION

- Ideal for Security and Perimeter Lighting
- For Warehouse, Schools, and Loading Docks
- Commercial, Industrial, and Institutional Lighting
- Suitable for damp location.

ELECTRICAL CHARACTERISTICS

Model #	Voltage	Wattage	Hertz	Lumens	Ballast Type
CLS12-2PL13	120V	2x13W 2-Pin Compact Fluorescent GX23/ GX23-2	60Hz	1650	Magnetic
CLS12-PL26	120V	PL26W 4 Pin CF	60Hz		Electronic
CLS12-2PL26	120V	2-PL26, 4 Pin CF	50/60Hz		Electronic
CLS12-2Q42UNV	120-277V	2-PLQ42, 4PIN CF	50/60Hz		
CLS12HSNG		2-medium base sockets for two spiral compact fluorescent lamps.			

PHYSICAL CHARACTERISTICS

Width	Height	Depth
12"	12"	5 1/2"

Edsun Lighting Fixture Mfg.

666 W. 17 St., HIALEAH, FL 33010 • www.edsunlighting.com • fax: 305 893-0006 • email: sales@edsunlighting.com

