



CLS8

Shallow vandalier canopy

8" x 8"

DESCRIPTION

Medium size fixture: 26 and 32 watt compact fluorescent lamp. Reflector is die-formed heavy gauge steel in white finish with clear vandalproof polycarbonate refractor.

SPECIFICATIONS

Reflectors / Backplate:

Heavy gauge cold rolled steel with high reflectance baked white enamel

Refractor:

Injection molded polycarbonate, designed for maximum structural strength

Screws:

Tamperproof center pin Torx-head and slotted Phillips head stainless steel screws are available upon request. Available with phillips stainless steel machine screw.

UL Listing:

Suitable for wet locations. Fixtures can be wired with 90° C supply wiring if supply wires are routed 3" away from ballast.

Sockets:

Plug-in type, thermoplastic

Color:

Clear

Ballast Minimum Starting Temperature:

0

Weight:

3.6

Lens:


Clear Polycarbonate



Replacent lenses available. Part number: **CL8LENS**


PHOTOMETRIC

75w Incandescent @ 8' Mounting Height

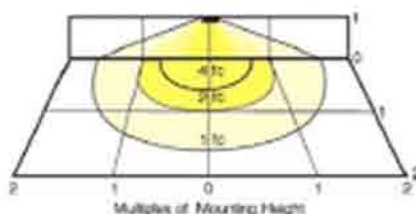

Mounting Height	Multiplier
8'	1.0
9'	.8
10'	.7
12'	.4
14'	.3

Watts	Multiplier Incan. CFL
26	1.5
32	.2
75	1.0

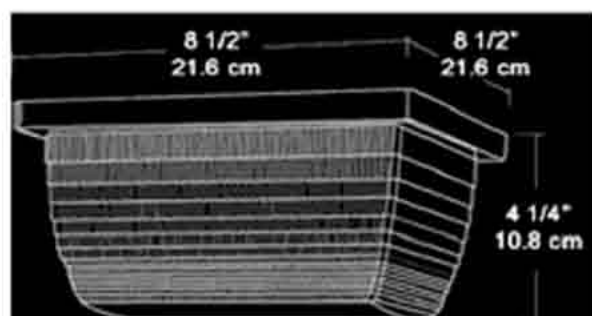

Edsun Lighting proudly assembled in the USA.

ORDERING INFORMATION

Compact Fluorescent
Lamp supplied with fixture

Total Watts	Lamp Type	Lamp Base	Ballast
26	2-13W	GX23	NPF 120V
26	26CFT	GX24Q	NPF 120V
32	32CFT	GX24Q	MV

Starting Amps/ Operating Amps	120V	208V	240V	277V
0.58				

Input Watts	LAMP ANSI	Initial Lumens	Lamp Hours
34		1720	1000

Available with LED type a lamp 6W

Note: Specifications may change without notice



Underwriters
Laboratories

WORLDWIDE PARTNER

Edsun Lighting Fixture Mfg. 569 W. 17 St. Hialeah, FL 33010-2412 • Ph.: 305 888-8849 • Fax 305-883-0005

WEB: www.edsunlighting.com • email: sales@edsunlighting.com