# LED ARCHITECTURAL TRIM 6 inch



Project:	
Туре:	
Catalog #:	

#### STANDARD











#### APPLICATIONS

6" architectural Recessed downlight retrofit solution with integrated LED power supply and thermal management system combined in a single compact unit designed to fit most standard 6" recessed cans. Also works in new construction applications.

#### ILLUMINATION

- Long life LEDs with up to 50,000 hours at 70% lumen maintenance.
- Choice of 3500k, 4000k, & 5000k color temperature with 80 CRI
- Produces 1500 lumens output from luminaire.
- Uses 1.18W high power, high quality LEDs.

#### **ELECTRICAL**

Dimmable to 0-10V dimmers.

SYLVANIA	45167		
Leviton Decora	IP710-LFZ		
Lutron Diva	DVSTV-WH		
Cooper	DF10P-C1		

- Save 75% compared to incandescent sources.
- High efficiency driver with a power factor ≥ .90 with input power of 120V-277V, 50-60Hz.
- Built-in LED Driver.
- Power consumption of 17watts.
- Operation temperature of 20°C- 40°C (-4°F- 104°F).

#### MOUNTING

Easy to install flex-cable into a junction box.




## HOUSING

- Compatible with most 6" architectural housings or frames
- Compatible with insulated, non-insulated, and air-tight
- Durable thermoplastic and aluminum construction.
- Flexible cable.
- Optional 6" square snap-on
- Optional 6" silver and white aluminum round trim

### WARRANTY/LISTING

- Tested in accordance with IESNA LM79 & LM80.
- ETL Listed for wet location, US and Canada (new construction).
- ETL Classfied for wet location, US and Canada (retrofit).
- Energy Star certified.
- Passes FCC Class A.
- Meets State of California Title 24 requirements.
- Five year warranty on all electronics and housing.

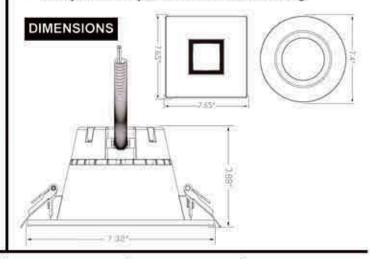

# ORDERING INFORMATION

MODEL	OPTIONS		KELVIN RATING		LUMENS	
LEDHHRFAGUNV-35K B		White Baffle	35K	3500K	1500	
Special Order	BW	White Baffle	4/0	4000K	1500	
LEDHHRFA6UNV-50K	BW	White Baffle	5K	5000K	1500	
LED56-TRMPLT-ECO-SQ		Square	NA		NA	
LED6A-TRMPLT-ECO-SPWHT		Silver/White	NA		NA	