



# LEDBHB



## STANDARD



The LEDBHB is a round LED high bay luminaire, which is designed to illuminate a wide variety of settings, including commercial, industrial & retail settings such as warehouses, manufacturing plants, sporting venues and big-box retailers. With a die cast aluminum housing and polycarbonate lens, the LEDBHB provides durability and high performance. High-efficacy, long-life LEDs provide both energy and maintenance cost savings compared to traditional, HID high bays.

## FEATURES

- Available in 5000k color temperatures.\*
- Long-life LEDs provide 69,000 hours of operation with at least 70% of initial lumen output ( $L_{70}$ ).<sup>†</sup>
- LEDBHB100 provides 13,092 lumens & 132 lumens per watt at 5000k.\*
- LEDBHB150 provides and 20,879 lumens & 142 LPW at 5000k.\*
- LEDHBR220W provides 27,023 lumens & 120 LPW at 5000k.\*
- Universal 120-277 AC voltage (50-60Hz) is standard. 480 AC voltage is available for LEDBHB150-50K and LEDBHB220-50K special order.
- Watertight, compression-type electrical connectors prevent moisture intrusion.
- Optional polycarbonate junction box attaches to the luminaire housing, and provides a convenient mounting option for occupancy sensors, or for making electrical connections at the luminaire.
- Optional polycarbonate occupancy sensor mount attaches to junction box knock-out ( $\frac{1}{2}$ " NPS), and provides extension from the housing for effective occupancy sensor placement.
- 0-10vdc dimming drivers are standard.
- Power factor > 0.90.
- Total harmonic distortion < 20%.
- Color rendering index > 80.
- Painted die cast aluminum housing.
- Easy installation in new construction or retrofit.

\* Contact factory for other color temperatures and lumen packages.  
<sup>†</sup>  $L_{70}$  hours are IES TM-21-11 calculated hours.

## WARRANTY & LISTINGS


- cULus listed for wet locations in ambient temperatures from -20°C to 40°C (-4°F to 104°F).
- IP65 rated for ingress protection.
- IK10 rated for protection from external impacts.
- DLC standard approved.
- Complies with FCC Part 15, class B.
- Complies with EN61000-4-5, surge immunity protection (4kV).
- 5-year warranty of all electronics and housing.

## MOUNTING OPTIONS

- Suspension from pre-installed hook (M10 eyebolt, 304 stainless steel) with locking screw is standard.
- Optional painted steel yoke mounting bracket kit (shown below) provides directional adjustability.



## DIMENSIONS

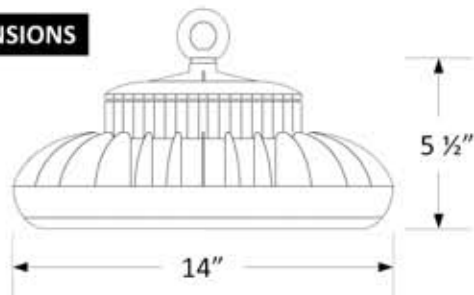

Weight: 13.2 lbs.

## ORDERING INFORMATION

Example: LEDBHB150UNV-50K

Model	Luminaire Watts	Luminaire Lumens	Lumens Per Watt	Color Temperature	Options (Order Separately)
LEDHBR100W	100	13,092	132	5K = 5000k	LEDBHB-LY = Yoke-mounting bracket kit
LEDHBR150W	148	20,879	142	5K = 5000k	
LEDHBR220W	222	27,023	120	5K = 5000k	

**ELECTRICAL DATA**


Model	Color Temp.	CRI <sup>1</sup>	Luminaire Lumens	Luminaire Watts	Lumens/Watt	Input Voltage <sup>2</sup>	Input Current (A)			Power Factor	THD <sup>3</sup>	L <sub>70</sub> Hours <sup>4</sup>
							120V	240V	277V			
LEDHBR100W-5K	5000k	>80	13,092	100	132	120-277	0.83	0.42	0.36	>90%	<20%	69,000
LEDHBR150W-5K	5000k	>80	20,879	148	142	120-277	1.23	0.62	0.53	>90%	<20%	69,000
LEDHBR220W-5K	5000k	>80	27,023	222	120	120-277	1.85	0.93	0.80	>90%	<20%	69,000

<sup>1</sup> Color rendering index.

<sup>2</sup> All 50-60Hz.

<sup>3</sup> Total harmonic distortion.



<sup>4</sup> L<sub>70</sub> refers to the number of hours at which lumen output declines to 70% of the initial level. L<sub>70</sub> hours are IES TM-21-11 calculated hours.

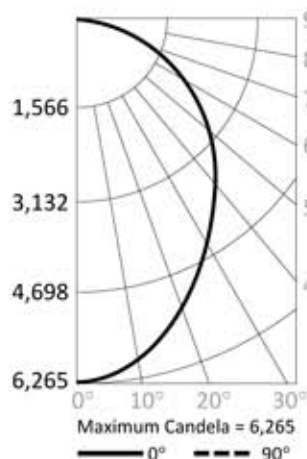**PHOTOMETRIC DATA**
**LEDBHB100UNV-50K (13,092 Lumens)**

**Candlepower Summary**

	0°	90°
0°	6,265	6,265
10°	5,917	5,829
20°	5,204	5,132
30°	4,499	4,429
40°	3,737	3,652
50°	2,846	2,754
60°	1,887	1,781
70°	761	687
80°	176	157
90°	0	0

**Zonal Lumen Summary**

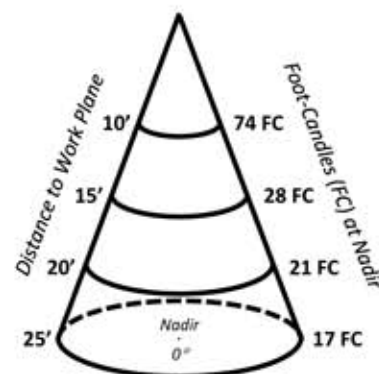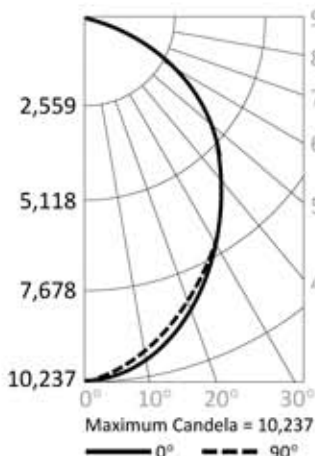
Zone	Lumens	% Fixture
0° – 10°	579	4.4%
0° – 20°	2,134	16.3%
0° – 30°	4,347	33.2%
0° – 40°	6,901	52.7%
0° – 50°	9,392	71.7%
0° – 60°	11,440	87.4%
0° – 70°	12,633	96.5%
0° – 80°	13,032	99.5%
0° – 90°	13,092	100.0%
90° – 180°	0	0.0%
0° – 180°	13,092	100.0%

**Cone of Light**

**LEDBHB150UNV-50K (20,879 Lumens)**

**Candlepower Summary**

	0°	90°
0°	10,210	10,210
10°	9,776	9,541
20°	8,513	8,319
30°	7,247	7,078
40°	5,929	5,853
50°	4,392	4,363
60°	2,830	2,854
70°	1,058	1,160
80°	248	263
90°	0	0

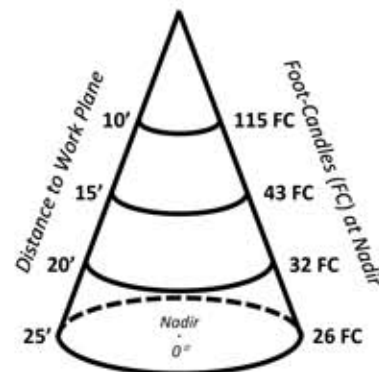**Zonal Lumen Summary**

Zone	Lumens	% Fixture
0° – 10°	944	4.5%
0° – 20°	3,474	16.6%
0° – 30°	7,048	33.8%
0° – 40°	11,131	53.3%
0° – 50°	15,079	72.2%
0° – 60°	18,302	87.7%
0° – 70°	20,167	96.6%
0° – 80°	20,786	99.6%
0° – 90°	20,879	100.0%
90° – 180°	0	0.0%
0° – 180°	20,879	100.0%


**Cone of Light**






## PHOTOMETRIC DATA

### LEDBHB220UNV-50K (27,023 Lumens)

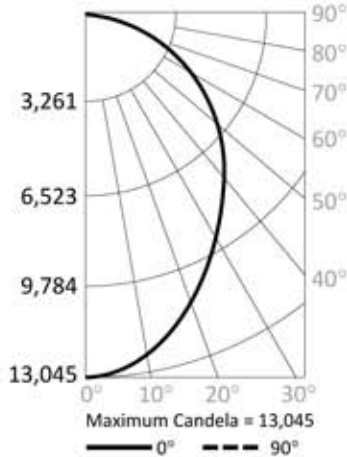


#### Candlepower Summary

	0°	90°
0°	13,025	13,025
10°	12,257	12,471
20°	10,793	10,971
30°	9,349	9,470
40°	7,770	7,728
50°	5,876	5,821
60°	3,886	3,662
70°	1,562	1,241
80°	352	269
90°	0	0




#### Zonal Lumen Summary

Zone	Lumens	% Fixture
0° – 10°	1,185	4.4%
0° – 20°	4,376	16.2%
0° – 30°	8,925	33.0%
0° – 40°	14,174	52.5%
0° – 50°	19,319	71.5%
0° – 60°	23,580	87.3%
0° – 70°	26,080	96.5%
0° – 80°	26,904	99.6%
0° – 90°	27,023	100.0%
90° – 180°	0	0.0%
0° – 180°	27,023	100.0%

#### Cone of Light

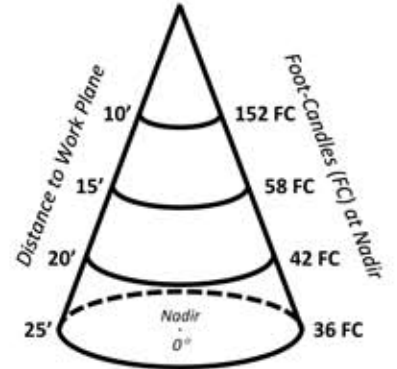

### LEDBHB100UNV-50K (13,092 Lumens) LEDBHB150UNV-50K (20,879 Lumens) LEDBHB220UNV-50K (27,023 Lumens)

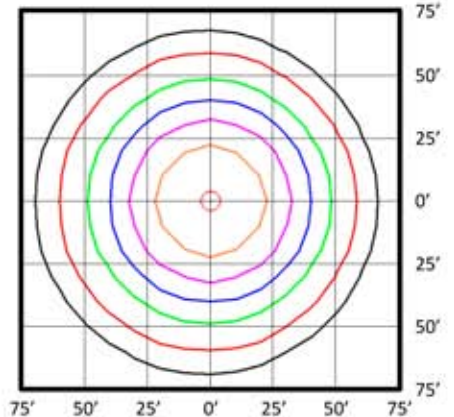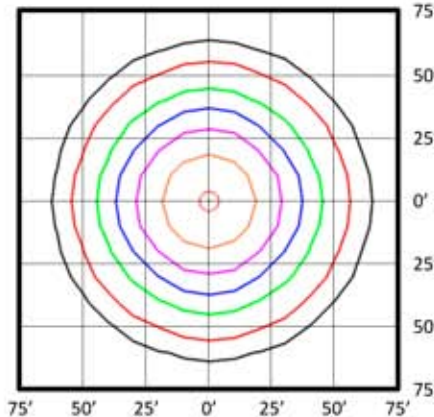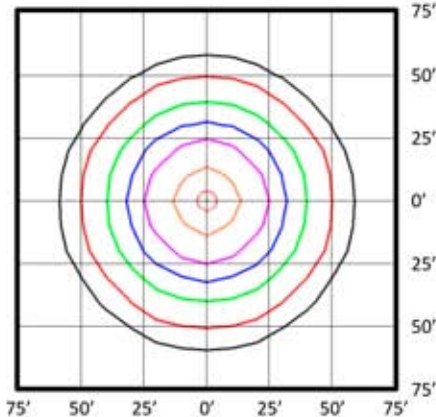

#### Notes:

- Isofootcandle plots depict initial footcandles at grade.
- Gridlines represent units of mounting height of 25 feet.