

"LY" Standard Lay-in



Fluorescent & HID Manufacturer

Committed to Quality!

"LY" SERIES



GENERAL DESCRIPTION

Recessed lay-in 2 x 2 and 2 x 4 fixtures for use with prismatic lenses or celled louvers in exposed T-bar ceilings. The body is the same shape for 2 x 2 and 2 x 4. The fixtures are U.L. listed as a recognized component (U.L. # 107722).

SPECIFICATIONS

Housing: 3-3/4" deep. Die-formed standard or -gauge steel with rounded side flanges for safe handling. Embossed for maximum rigidity. Four corner tie points for safety wire supports.

Ends: Snap into housing and can be additionally secured with a #8 x 3/8" screw or 1/8" pop rivet with 1/8" to 3/16" grip. Same ends fit 2 x 2 and 2 x 4.

Socket Plates: Snap-in type. Available in 2, 3, 4 and U-lamp. Four-light and U-lamp are the same plate. Sockets are tilted forward to provide positive spring action contact with lamps. Same socket plates fit 2 x 2 and 2 x 4. (Slide-on low-profile front-loading sockets for use with -gauge steel recommended.)


Ballast Cover: Snaps in without tools for easy installation.

Access Plate: Snaps in for simple ballast lead hook up without removing door or ballast cover.


2x2: T8, T12 or T5

LY22-U40 • LY22-U32 • LY22-2 and 3PLL40
 LY22-2 or 3 or 420 • LY22-2 or 3 or 417
 LY22-2 or 3 or 414 • LY22-2 or 3 or 424
 LY22-2 or 3U31


2x4 :T12, T8 or T5

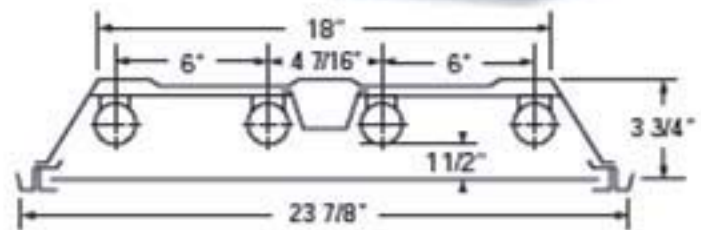

LY24-440 • LY24-432 • LY24-428 • LY24-454

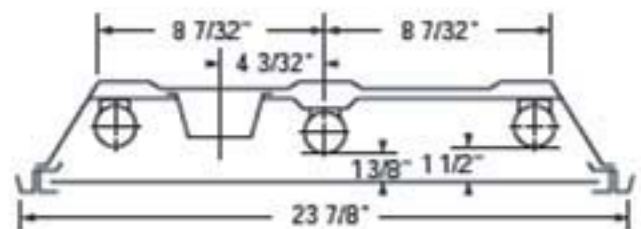

LY24-340 • LY24-332 • LY24-328 • LY24-354

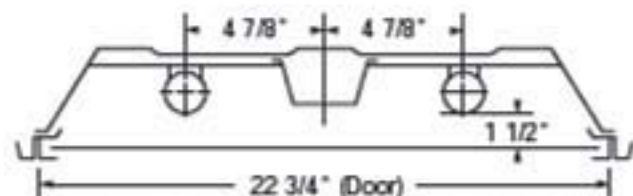

LY24-240 • LY24-232 • LY24-228 • LY24-254

1x4 :T12, T8 or T5

LY14-240 • LY14-232 • LY14-228 • LY14-254

Available with .125 A12 lens.

569 WEST 17 ST., HIALEAH, FL 33010 • PH. 305-8888849 • FAX: 305-8830005
 E-MAIL: edsunlighting@sprynet.com

Available with dimming ballasts.

Emergency battery for one or two lamp applications can be added upon request.