

Linear Fluorescent Series


Fluorescent Sign Lights, T5



SL154 • SL254



Special Order

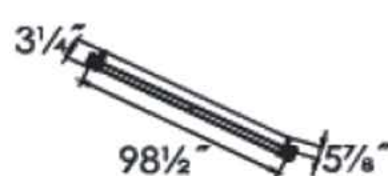

SL2154 • SL2254



Housing:

Heavy-duty extruded aluminum body, cast aluminum end plates, white powdercoat finish on inside and outside . Ask about other other colors options.

Lens:

Acrylic lens

Socket:

T5 fluorescent sockets

Mounting:

Mount on conduit (not included)

Wattage:

4': SL154 • SL254

8': SL2154 • SL2254

Available with major brand program start 120-277V ballast.

Ratings:

CSA: Listed for wet locations

UL: Listed for wet locations

New T5 technology

for use with Non HO and

HO lamps 2 lamp

applications, Available

in 4', 6' and 8' lengths, uses

• 4' (50-1/2")

Use F28T5 or

F54T5HO lamps.

-SL228-UNV

-SL254HO-UNV

• 6' (74-1/2") • Special order •

Use F21T5 or

F39T5HO lamps.

-SL2221-UNV

-SL2239HO-UNV

• 8' (98-1/2")

Use F28T5 or

F54T5HO lamps.

-SL2228-UNV

-SL2254HO-UNV