




SOMR16

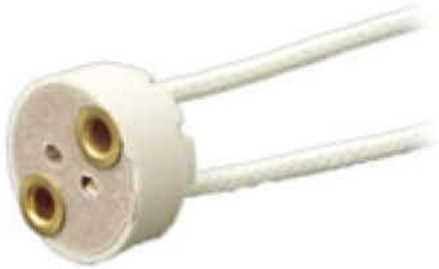

Lampholders

Item Description

Miniature Bi-Pin Base, G4, G6.35, GY6.35, GX5.3 MR16, GZ4 MR11, Halogen, Incandescent, Ceramic Body Lampholder, Mounting Holes, , Side Wired, - White

Technical Information

Electrical Specifications

Max. Wattage Rating: 750W

Max. Voltage: 250 Volt

Max. Amperage: 12 Amp

Material Specifications

Body Material: Ceramic Body

Cover Material: Mica

Contact Material: Nickel-Plated Copper-Alloy

Color: White

Availability: OEM Only

Mechanical Specifications

ANSI Lamp Type: G4, G6.35, GY6.35, GX5.3 MR16, GZ4 MR11

Lamp Socket Base: Miniature Bi-Pin

Access: Side Wired

Termination: 12-Inch 18GA SEW-1 200C Wire Leads

Wire Strip Length: 1/2 Inch

Product Features

Lamp Socket Base: Miniature Bi-Pin

ANSI Lamp Type: G4, G6.35, GY6.35, GX5.3 MR16, GZ4 MR11

Mounting Type: Mounting Holes

Access: Side Wired

Termination: 12-Inch 18GA SEW-1 200C Wire Leads

Standards and Certifications: UL/CSA

Warranty: 1 Year Limited

Availability: OEM Only

Standards and Certifications

UL Recognized: Component E13405

CSA Certified: File LR-1863

Features and Benefits

· **WARNING:** Miniature Quartz Halogen Lamps operate under pressure and high temperatures. To prevent socket damage, the design of the fixture and its application must be carefully considered. For Leviton warranties to apply to this product, lamp wattage, current and beam spread must be controlled to insure that the following temperature limits are never exceeded.

· At contacts within socket - 225C

· Socket lead wires - 200C

· **NOTE:** Maximum rating of 250C available when appropriately rated leads are used.

0.472 (11.99) CENTERS
FOR #4 SCREWS

